

# D6M\_B4A

## 330W - 365W

### Mono-Crystalline Photovoltaic Module



Positive power tolerance  
0~+4.99 watt



Excellent low light performance  
3.5% relative eff. reduction at low-irradiance (200W/m<sup>2</sup>)



100% EL inline inspection  
Better module reliability



Prolonged aging test  
2000 hours damp heat test; 400 thermal cycles



Ammonia resistance  
According to IEC 62716 Ed. 1



www.tuv.com  
ID 000038214



Certificate Number MCS PV0203 Technology



#### Reliability & Certification

Product guarantee: 10-year

Linear Performance Warranty


- 1-year: 97% power output  
then power degradation 0.7% per year till 25th year

- 25-year: 80.2% power output

- 10-year: 90.7% power output

UL 1703, CEC, IEC 61215/IEC 61730, CE, MCS

\* Please refer to NSP product warranty for details

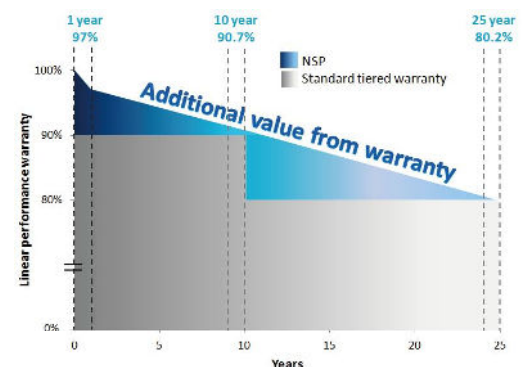

For more information, please visit us at [www.nsp.com](http://www.nsp.com)



# NEO SOLAR POWER

## Electrical Data

### MODEL

Maximum Rating Power (Pmax)

Module Efficiency

Open Circuit Voltage (Voc)

Maximum Power Voltage

Short Circuit Current (Isc)

Maximum Power Current

## Front View & Back View

## Mechanical Data

Item	Specification
Dimension	
Weight	
Solar Cell	72                      6" silicon cells
Front Glass	
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Cover	Composite film, white
Junction Box	IP 6 rated
Frame	Anodized aluminum frame, original or black

## Operating Conditions

Item	Specification
Mechanical Load	
Maximum System Voltage	
Series Fuse Rating	15 A
Operating Temperature	-40 to 85 °C

## Contact Us

### Neo Solar Power Corporation

Headquarters: 7, Li-Hsin 3rd Rd., Hsinchu  
Science Park, Hsinchu, 30078, Taiwan

Tel: +886-3-578-0011  
Fax: +886-3-578-1255

[www.nsp.com](http://www.nsp.com)

Email: [sales.module@nsp.com](mailto:sales.module@nsp.com)  
Website: [www.nsp.com](http://www.nsp.com)