powered by Q.ANTUM DUO Z

PRELIMINARY

Q.PEAK DUO BLK-G10+
350-370

ENDURING HIGH PERFORMANCE

TÜVRheinland CERTIFIED
Quality Controlled PV
www.tuv.com
ID 1111232615

ntv GERMANY'S MOST POPULAR PROVIDER Life & Living Award 2021 1st Place Solar Technology Customer rating from 11 brands www.disq.de DEUTSCHES INSTITUT FÜR SERVICE-QUALITÄT GmbH & Co. KG

25 YR Warranty Product & Performance

EUPD RESEARCH TOP BRAND PV MODULES EUROPE 2021

Q CELLS Yield Security

BREAKING THE 20 % EFFICIENCY BARRIER
Q.ANTUM DUO Z Technology with zero gap cell layout boosts module efficiency up to 20.9 %.

THE MOST THOROUGH TESTING PROGRAMME IN THE INDUSTRY
Q CELLS is the first solar module manufacturer to pass the most comprehensive quality programme in the industry: The new "Quality Controlled PV" of the independent certification institute TÜV Rheinland.

INNOVATIVE ALL-WEATHER TECHNOLOGY
Optimal yields, whatever the weather with excellent low-light and temperature behaviour.

ENDURING HIGH PERFORMANCE
Long-term yield security with Anti LID Technology, Anti PID Technology[1], Hot-Spot Protect and Traceable Quality Tra.Q™.

EXTREME WEATHER RATING
High-tech aluminium alloy frame, certified for high snow (5400 Pa) and wind loads (4000 Pa).

A RELIABLE INVESTMENT
Inclusive 25-year product warranty and 25-year linear performance warranty[2].

[1] APT test conditions according to IEC / TS 62804-1:2015, method A (–1500 V, 96 h)
[2] See data sheet on rear for further information.

THE IDEAL SOLUTION FOR:
Rooftop arrays on residential buildings

Engineered in Germany

Q CELLS

MECHANICAL SPECIFICATION

Format	1717 mm × 1045 mm × 32 mm (including frame)
Weight	19.9 kg
Front Cover	3.2 mm thermally pre-stressed glass with anti-reflection technology
Back Cover	Composite film
Frame	Black anodised aluminium
Cell	6 × 20 monocrystalline Q.ANTUM solar half cells
Junction box	53-101 mm × 32-60 mm × 15-18 mm Protection class IP67, with bypass diodes
Cable	4 mm² Solar cable; (+) ≥1150 mm, (–) ≥1150 mm
Connector	Stäubli MC4; IP68

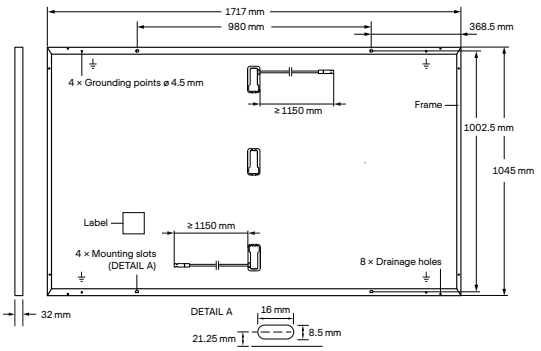

ELECTRICAL CHARACTERISTICS

POWER CLASS				350	355	360	365	370
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC[1] (POWER TOLERANCE +5 W / –0 W)								
Minimum	Power at MPP[1]	P_{MPP}	[W]	350	355	360	365	370
	Short Circuit Current[1]	I_{SC}	[A]	10.97	11.00	11.04	11.07	11.10
	Open Circuit Voltage[1]	V_{OC}	[V]	41.11	41.14	41.18	41.21	41.24
	Current at MPP	I_{MPP}	[A]	10.37	10.43	10.49	10.56	10.62
	Voltage at MPP	V_{MPP}	[V]	33.76	34.03	34.31	34.58	34.84
	Efficiency[1]	η	[%]	≥19.5	≥19.8	≥20.1	≥20.3	≥20.6
MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT[2]								
Minimum	Power at MPP	P_{MPP}	[W]	262.6	266.3	270.1	273.8	277.6
	Short Circuit Current	I_{SC}	[A]	8.84	8.87	8.89	8.92	8.95
	Open Circuit Voltage	V_{OC}	[V]	38.77	38.80	38.83	38.86	38.90
	Current at MPP	I_{MPP}	[A]	8.14	8.20	8.26	8.31	8.37
	Voltage at MPP	V_{MPP}	[V]	32.24	32.48	32.71	32.94	33.17

[1]Measurement tolerances P_{MPP} ±3%; I_{SC}; V_{OC} ±5% at STC: 1000 W/m², 25±2 °C, AM 1.5 according to IEC 60904-3 • [2]800 W/m², NMOT, spectrum AM 1.5

Q CELLS PERFORMANCE WARRANTY

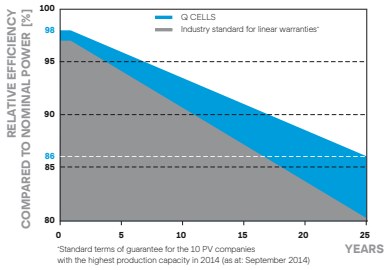

At least 98% of nominal power during first year. Thereafter max. 0.5% degradation per year. At least 93.5% of nominal power up to 10 years. At least 86% of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organisation of your respective country.

PERFORMANCE AT LOW IRRADIANCE

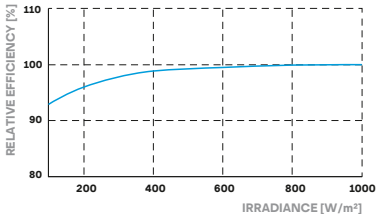

Typical module performance under low irradiance conditions in comparison to STC conditions (25 °C, 1000 W/m²).

TEMPERATURE COEFFICIENTS							
Temperature Coefficient of I_{SC}	α	[%/K]	+0.04	Temperature Coefficient of V_{OC}	β	[%/K]	–0.27
Temperature Coefficient of P_{MPP}	γ	[%/K]	–0.34	Nominal Module Operating Temperature	NMOT	[°C]	43±3

PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage	V_{SYS}	[V]	1000	PV module classification		Class II
Maximum Reverse Current	I_R	[A]	20	Fire Rating based on ANSI / UL 61730		C / TYPE 2
Max. Design Load, Push / Pull		[Pa]	3600 / 2660	Permitted Module Temperature on Continuous Duty		–40 °C - +85 °C
Max. Test Load, Push / Pull		[Pa]	5400 / 4000			

QUALIFICATIONS AND CERTIFICATES

Quality Controlled PV - TÜV Rheinland;
IEC 61215:2016; IEC 61730:2016.
This data sheet complies with DIN EN 50380.
QCPV Certification ongoing.

TÜVRheinland CERTIFIED
www.tuv.com
ID 1111220277

CE

Note: Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Hanwha Q CELLS GmbH
Sonnenallee 17-21, 06766 Bitterfeld-Wolfen, Germany | **TEL** +49 (0)3494 66 99-23444 | **FAX** +49 (0)3494 66 99-23000 | **EMAIL** sales@q-cells.com | **WEB** www.q-cells.com

Engineered in Germany

Specifications subject to technical changes © **Q CELLS** Q.PEAK DUO BLK-G10+_350-370_2021-08_Rev01_EN